

RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

·材质及电镀(Material)

焊针(Pin header):黄铜,镀锡(Brass,Tin plated)

塑件(Housing): PA66, UL94V-0

·电气性能(Electrical)

额定电压(Rated Voltage): 300V

额定电流(Rated Current): 15A

接触电阻(Contact Resistance): 20mΩ



绝缘电阻(Insulation Resistance): 5000MΩ/1000V

耐电压(Withstanding Voltage): AC2000V/1Min


·机械性能(Mechanical)

温度范围(Temperature Range): -40℃~+105℃

瞬时温度(MAX Soldering): +250℃, 5秒(5 Seconds)

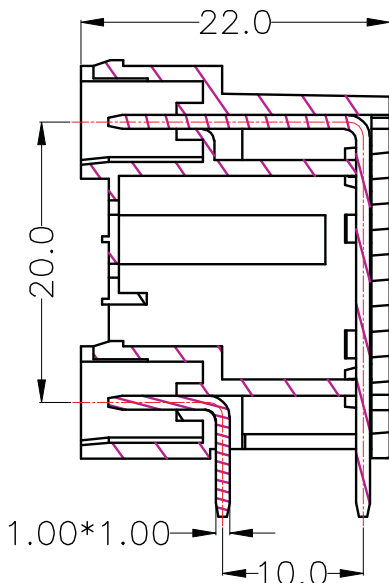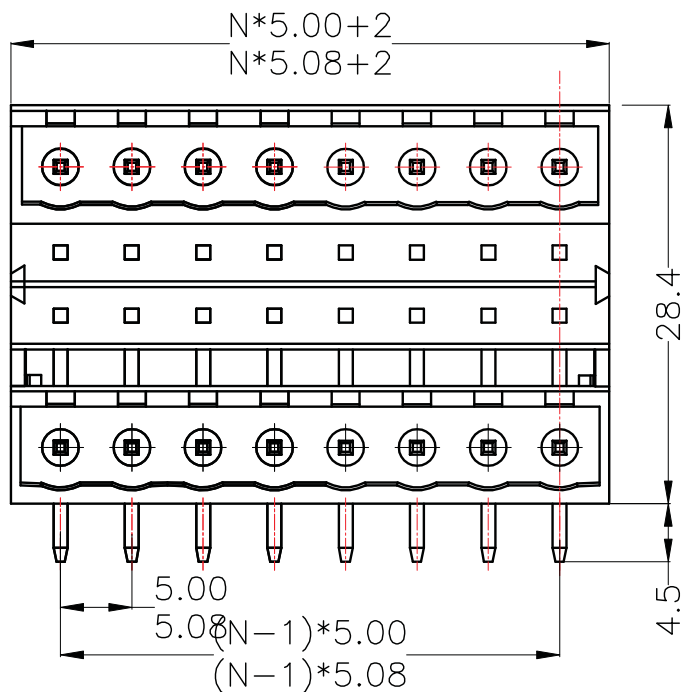

订购方式/HOW TO ORDER

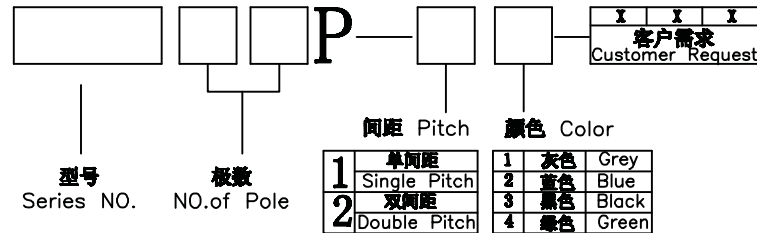

Contact Us

TEL: +86 - 574 - 63510149

FAX: +86 - 574 - 63516735

E-Mail: Sales@cxsuteng.com

Website: www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°.	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST2EDGRH-5.0/5.08
.X	±0.20	.X°.	±2°	角法 VIEW	$\oplus \ominus$	设计 DESIGN	No.06		
.XX	±0.15	.XX°.	±1°	比例 SCALE	1:1	审核 CHKD		产品料号 PART NO.	ST2EDGRH-5.0/5.08
.XXX	±0.02	.XXX°.	±0.5°	版本 VER	AO	核准 APPD		图号 DRAW NO.	ST2EDGRH-5.0/5.08
日期 DATE	2012.07.10								

N=No. of contacts